

12R5.2

::Driver: patrick miltat

::Date: 14-15/01/2012

::Track: rmcp pierrelatte

::Event: french nats

Setup sheet for Team Associated's 12R5.2

::Front Suspension

Ride height: 3,2mm

Upper arm mounts: 0° 5° 10°



Camber: 1° Toe: 0°

Droop: just a little

Bumpsteer shims: 1mm

King pin lube: 30k

Springs: 0,18

Front Brace: None Soft Hard kit

Front width: _____

Roll Center

Shims on top of the steering block: none

Shims between bulkhead and caster block: _____

Notes: _____

::Front Tires

Brand & compound: jaco magenta

Diameter: 41,2mm

Wheel: jaco

Tire treatment: cs

Treatment time: 10min

Surface treated: 1/2

Notes: _____



::Rear Suspension

Ride height adjuster: 3,0

Chassis ride height: 3,5mm

Pod ride height: 4mm

Droop: 1mm

Rear width: _____

Shims under pivot: _____

Side damper

Springs: silver

Oil: 25

Center damper

Brand: AE

Spring: Gold


Oil: 25

Position:

High Low



Shims: 2mm

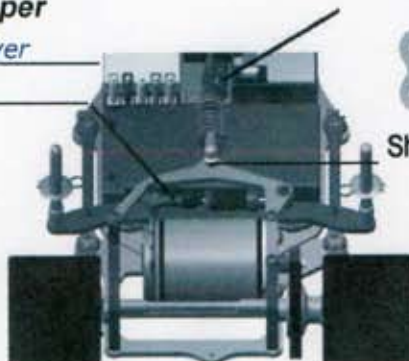

Notes: _____

::Rear Tires

Brand & compound: jaco pink

Diameter: 43,5mm


Wheel: jaco

Tire treatment: cs

Treatment time: 30min

Surface treated: full

Notes: _____



::Body

Brand & model: protoform amr12 light

Notes: _____

::Track Info

Composition: Asphalt Carpet

Surface: Smooth Bumpy

Traction: High Medium Low

Notes: _____

::Motor / Battery

Motor: prt 4,5 Rotor: _____

Timing: _____

Pinion: 26 Spur: 96

Rollout: 0.000

Battery: ip 6000mah 60c

Plugs position: Front Back

::Speed Control

ESC: prt 10

Setting: _____

::Transmitter

Turning Circle: 73

Steering Expo: -10

Brake E.P.: _____

Throttle Expo: 0

Notes: _____