


Setup Sheet for Team Associated's RC8B

Rev. 1


:: Front Suspension

- anti-roll bar:
 2.2 - black
 2.5 - silver
 2.8 - gold

bump-steer washers:
old rack
 out



upper hinge pin bushing
 front # 2 rear # 1
 up down up down

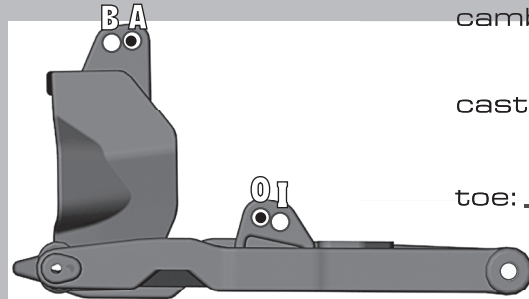


camber: -3 °
 caster: 16 °
 toe: +1 °

ride height: 26mm

kickup bushing
 # 2
 up down


:: Rear Suspension

- anti-roll bar: wheelbase:
 2.2 - black long
 2.5 - silver medium
 2.8 - gold short



camber: -2 °

toe bushing d-plate:
 # 3deg
 in out

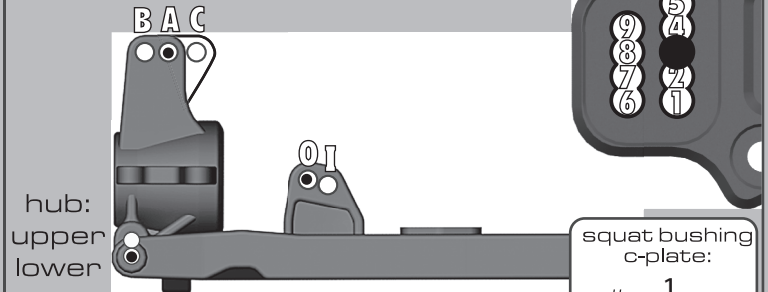

hub: upper lower
 ride height: 26mm

squat bushing c-plate:
 # 1
 up down

:: Front Shocks

spring: AE bronze piston: Ghea 10x1.1
 shock fluid: AE30w length: _____
 shock cap: _____ rebound: full

:: Rear Shocks

spring: AE Silver piston: Ghea 10x1.1
 shock fluid: AE25w length: _____
 shock cap: _____ rebound: full

:: Chassis Braces / Wheel Hex

- chassis braces:
 pivot molded aluminum
 wheel hex:
 standard narrow

:: Steering Blocks

- steering blocks:
 standard
 cnc FT knuckles

:: Rear Hubs

- rear hubs:
 standard
 cnc FT hubs

:: Differentials

front fluid: AE5K
 center fluid: AE5K
 rear fluid: AE5K

:: Wing

location: forward back
 angle: low med. high
 type: PL low gap: _____

:: Gearing/Clutch

gearing: 17/44
 clutch shoes: 2 plastic 1 Hard
 clutch spring: .9mm 1.0mm 1.1mm

:: Engine

engine: Reedy 121VR restrictor: 7mm
 muffler: HN 2047 temp: _____
 glow plug: OS P4
 fuel: Byron Genll 30%

:: Tires

tire (F/R): JC / Cross Bow
 compound (F/R): yellow / _____
 insert: standard foam wheel: 83mm AE
 traction additive: _____

:: Race and Vehicle Comments

qualify: TQ main: A finish: 4th tq:
 comments:

:: Track Info

smooth: bumpy: blue groove:
 traction: high med. low
 soft dirt: grass: clay: wet:
 dusty: other: _____